

The non-deterministic quantum logic operation and teleportation of a vacuum and single photon superposition state via parametric amplifiers

XuBo Zou, K. Pahlke and W. Mathis
Electromagnetic Theory Group at THT,
Department of Electrical Engineering,
University of Hannover, Germany

Abstract

We firstly present an all-optical scheme to implement the non-deterministic quantum logic operation of Knill, Laflamme and Milburn (Nature, 409, 46-52(2001)). In our scheme, squeezed vacuum state is acted as auxiliary state instead of single photon resources. Then we demonstrate that same setup can be used to teleport a superposition of vacuum and single photon state of the form $\alpha|0\rangle + \beta|1\rangle$ and a superposition of vacuum and single polarized photon state of the form $\alpha|0\rangle + \beta|H\rangle + \gamma|V\rangle$.

PACS number: 03.67.-a, 03.65.Ud, 42.50.-p

I. INTRODUCTION

The development of quantum algorithms shows impressively, that a quantum computer can provide an enormous speed up compared to classical computers [1][2]. This principle theoretical result motivated an intensive research in the field of quantum information processing. Several physical systems were suggested to implement the concept of quantum computing: cavity QED systems[3] and trapped ion systems[4], quantum dot systems [5] and Josephson-junction device systems [6]. The realization of a linear optical quantum computer is particularly appealing because of the robust nature of quantum states of light against the decoherence. Recently the implementation of a probabilistic quantum logic gate was proposed, which is based on linear optical elements[7]. A non-deterministic gate, which is known as the nonlinear sign-gate (NLS), was proposed in this paper. This gate transforms the quantum states, which are labeled by the photon occupation number, according to

$$\alpha|0\rangle + \beta|1\rangle + \gamma|2\rangle \rightarrow \alpha|0\rangle + \beta|1\rangle - \gamma|2\rangle. \quad (1)$$

The probability of success is $p_c = 1/4$. Although the scheme in Ref [7] contains only linear optical elements, the optical network is complex and would present major stability and mode matching problems in their construction. Several less complicated schemes with linear optical elements were presented [8, 9, 10] to implement the NLS-gate with a slightly lower probability of success. In addition, if the information is stored in the polarization of photons, a probabilistic quantum logic gate (CNOT-gate and controlled-phase gate) can also be implemented [11, 12]. But these schemes require

single photon or entangled photon states as a auxiliary resource. The requirement of single photon resources is a difficult constraint to satisfy with available technology, while currently triggered single photon sources operate by means of fluorescence from a single molecule [13] or a single quantum dot [14, 15], which have terrible spatial properties, and do not meet the requirement for linear quantum information processing. As described in Ref[7], simple photon resource can be generated using weak squeezing and particle detectors. A non-degenerate squeezer is applied to the vacuum state, the output consists of the a superposition of the states with identical numbers of the bosons in the two modes. Thus a single photon state can be produced in one of the modes conditioned on the the single photon detection of another mode. In this case, a all-optical non-deterministic quantum logic operations can be implemented by using the four photon modes and three photon detectors with lower probability of success $p_s p_c$. Here $p_s < 0.25$ is probability of generation of single-photon state by using non-degenerate squeezer. More recently an experiment is implemented for realizing a control conditional phase gate using parametric down-conversion, which is based on the post-selective method[16].

Quantum teleportation, invented by Bennett et al[17], is one of the essential primitive of quantum communication, which transmit a quantum state from one observer to another observer through dual EPR state[18] and classical communication. Since the first successful realization of teleportation was reported[19], the teleportation concept is extended to the continuous variable[20]. A number of schemes have been presented for teleportation of discrete system[[21]-[27]]. In Ref[27], schemes have been proposed to teleport a running wave superposition of zero and one-photon field state , in which entangled state channel is prepared through a single photon state incident a symmetric beam splitter. For continuous variable teleportation[20], the first experimental realization is to teleport a coherent state by means of the parametric amplifier and quadrature-component measurement[28]. It has also been realized that the number-difference, phase-sum teleportation protocols can be realized by using parametric amplifier and the measurement of phase[29]. Further, Clausen et al proposed a variation on the scheme of Milburn and Braunstein avoiding problem associated with the measurement of phase and demonstrate the Fock state can be teleported with a fidelity equal to unity[30]. In Ref[31], continuous variable teleportation of single photon state was investigated using normal teleportation protocols[20, 28]. In this case, the output state is different from the single photon state due to the nonmaximal entanglement channel.

The main purpose of this paper is twofold. First, we firstly present an all-optical scheme to implement the non-deterministic quantum logic operation(1) using two non-degenerate squeezers and a two-photon coincidence detection. Our scheme does not need single photon resource as auxiliary resource and require three photon modes. Second, we show that the same setup can be used to teleport a superposition of vacuum and single photon state of the form $\alpha|0\rangle + \beta|1\rangle$ and a superposition of vacuum state and single polarized photon state of the form $\alpha|0\rangle + \beta|H\rangle + \gamma|V\rangle$, which illustrate the quantum teleportation with three-state system, namely, the basis states are $\{|0\rangle, |H\rangle, |V\rangle\}$.

II. THE NON-DETERMINISTIC QUANTUM LOGIC OPERATION

Our scheme is based on the teleportation protocols[17]. To use teleportation schemes for universal quantum computation was first suggested by Gottesman and Chuang [32]. Since the scheme of the Knill et al[7], several scheme has been proposed for linear optical quantum computation[8]-[12]. But these schemes require entangled photon states or single photon state as an auxiliary resource. Recently an experiment is implemented for realizing a control conditional phase gate using parametric down-conversion[16]. However, the scheme is based on the post-selective method, which limit application of the scheme. Now we will describe the realization of the non-deterministic quantum logic operation(1), in which an squeezed vacuum state is auxiliary photon state. The experimental setup is depicted in Fig.1, which require two non-degenerate squeezers and a two-photon coincidence detection. The input quantum state of the mode 1 is in the form

$$\Psi_{in} = \alpha|0\rangle_1 + \beta|1\rangle_1 + \gamma|2\rangle_1. \quad (2)$$

An ancilla quantum state in the vacuum state $\Psi_{ancilla} = |0\rangle_2|0\rangle_3$ is required. After mode 2 and 3 passing through the first parametric amplifier, whose transformation is given by

$$S_1 = \exp[\theta_1(a_2^\dagger a_3^\dagger - a_2 a_3)] \quad (3)$$

where a_2 and a_3 are bose annihilation operators. This expression can be rewritten in a disentangled form

$$U_3 = \exp(\sqrt{\gamma_1} a_2^\dagger a_3^\dagger)(1 - \gamma_1)^{(a_2^\dagger a_2 + a_3^\dagger a_3 + 1)/2} \exp(-\sqrt{\gamma_1} a_2 a_3) \quad (4)$$

where $\gamma_1 = \tanh^2 \theta_1$. Thus the output state of mode 2 and 3 is

$$\Psi'_{ancilla} = \sqrt{1 - \gamma_1} \sum_{n=0}^{\infty} \gamma_1^{n/2} |n\rangle_2 |n\rangle_3. \quad (5)$$

The coefficients γ_1 will be determined later. The field state $\Psi_{in} \Psi'_{ancilla}$ will directly be used for the NLS-gate implementation. One of the the two output modes of the first parametric amplifier is then used as one of the input modes of the second parametric amplifier, whose transformation is given by

$$S_2 = \exp[\theta_2(a_1^\dagger a_2^\dagger - a_1 a_2)] \quad (6)$$

and the mode whose quantum state Ψ_{in} is desired to be operated is the other input mode of the second parametric amplifier. After mode 1 and 2 passing through the the second parametric amplifier, the state of the system become

$$\begin{aligned} \Psi_{out} = & \sqrt{(1 - \gamma_1)(1 - \gamma_2)} [\sqrt{\gamma_2} \alpha |0\rangle_3 + \sqrt{\gamma_1}(1 - 2\gamma_2) \beta |1\rangle_3 \\ & + \gamma_1 \sqrt{\gamma_2} (3\gamma_2 - 2) \gamma |2\rangle_3] |1\rangle_1 |1\rangle_2 + \Psi_{other} \end{aligned} \quad (7)$$

The terms Ψ_{other} of this quantum state don't contribute to the events, which correspond to a 2-photon coincidence (one photon in each of the beams). The output state of the system, conditioned on the two-fold coincidence detection, is projected into

$$\Psi_{out} = \sqrt{(1 - \gamma_1)(1 - \gamma_2)} [\sqrt{\gamma_2} \alpha |0\rangle_3 + \sqrt{\gamma_1}(1 - 2\gamma_2) \beta |1\rangle_3 + \gamma_1 \sqrt{\gamma_2} (3\gamma_2 - 2) \gamma |2\rangle_3] \quad (8)$$

If we choose the parameter γ_1 and γ_2 to satisfy

$$\sqrt{\gamma_2} = \sqrt{\gamma_1}(1 - 2\gamma_2) = -\gamma_1\sqrt{\gamma_2}(3\gamma_2 - 2) \quad (9)$$

i.e. $\gamma_1 = (21 - 7\sqrt{2})/(9 + 4\sqrt{2}) \approx 0.757$ and $\gamma_2 = (3 - \sqrt{2})/7 \approx 0.226$, the output quantum state $\Psi_{out} = \alpha|0\rangle + \beta|1\rangle - \gamma|2\rangle$ is generated from the input quantum state Ψ_{in} . This is the transformation property(1) of the NLS-gate. The probability of success of our scheme will be approximate 4.25%. In scheme proposed in Ref[7] and [8, 9], if the single-photon resource is generated by using weak squeezing and particle detectors, a all-optical NLS gate can be implemented with the maximally probability of success 6.25% and 5.6%, respectively, which require four field modes and three photon detectors. Our scheme is comparatively simple, which only require two parametric amplifiers, three field modes and a two-photon coincidence detection. Since $\gamma_1 \approx 0.757$, this demonstrate the scheme work in strong coupling regime. The currently available parametric amplifier can produce strongly squeezed light. Aytur and Kumar[34] have reported on a parametric gain $\gamma_1 \approx 0.9$ in the Eq.(5). Another requirement of the scheme is two-photon coincidence detection which has been used for many polarization photon quantum information processing experiments in the weak coupling regimes[19, 35]. In the strong coupling regimes, it is required that these detectors should be capable of distinguishing different photon number. This requirement is met in proposed teleportation scheme involving photon number measurement[7, 8, 9, 10, 29, 30, 36].

III. THE TELEPORTATION OF A VACUUM AND SINGLE PHOTON SUPERPOSITION SATATE

In Ref[27], schemes have been proposed to teleport a running wave superposition of zero and one-photon field state, in which entangled state channel is prepared through a single photon state incident a symmetric beam splitter. In Ref[19], teleportation of the polarization state of single photon has been observed. In Ref[31], it was shown that single photon polarization state was not teleported with a fidelity equal to unity by using parameters and quadrature phase measurement. In this section, we will demonstrate that setup shown in Fig.1 can also be used to teleport a superposition state of zero and single photon $\alpha|0\rangle + \beta|1\rangle$ and a superposition of vacuum state and single polarized photon state of the form $\alpha|0\rangle + \beta|H\rangle + \gamma|V\rangle$.

Firstly we consider the teleportation of a superposition state of zero and single photon $\alpha|0\rangle + \beta|1\rangle$. We set $\gamma = 0$ in Eq.(2) and repeat the same process suggested in Sec.II. The output state of the system, conditioned on the two-fold coincidence detection, is projected into

$$\Psi_{out} = \sqrt{(1 - \gamma_1)(1 - \gamma_2)}[\sqrt{\gamma_2}\alpha|0\rangle_3 + \sqrt{\gamma_1}(1 - 2\gamma_2)\beta|1\rangle_3] \quad (10)$$

If we choose the parameter γ_1 and γ_2 to satisfy

$$\sqrt{\gamma_2} = \sqrt{\gamma_1}(1 - 2\gamma_2) \quad (11)$$

i.e. $\gamma_1 = \gamma_2/(1 - 2\gamma_2)^2$, we can obtain the expected teleported state $\Psi_{out} = \alpha|0\rangle + \beta|1\rangle$ with probability of success $2(1 - \gamma_1)(1 - \gamma_2)\gamma_2$. If $\gamma_2 \ll 1$, then $\gamma_1 \ll 1$. This means that two parametric amplifier can simultaneously work in the weak coupling regimes, which can be attained by the present experimental technology. In this weak regime, a number of experiments have been implemented for quantum information processing[19,

35]. Another requirement of the scheme is two-photon coincidence detection. In the weak coupling regime, two-photon coincidence detection has been used for teleportation of single polarization photons in Ref[19]. This demonstrate that the present scheme can be implemented with present technology.

So far, we have only considered teleportation of optical fields in zero and one photon-number superposition. In addition, one can introduce the polarization of the field, which may be used to encode information. It is interesting to teleport superposition state of the vacuum and single polarized photon of the form $\alpha|0\rangle + \beta|H\rangle + \gamma|V\rangle$, which illustrate the quantum teleportation with three-state system, namely, the basis states are $\{|0\rangle, |H\rangle, |V\rangle\}$. In this case, the input quantum state of the path 1 is in the form

$$\Phi_{in} = \alpha|0\rangle_1 + \beta|H\rangle_1 + \gamma|V\rangle_1. \quad (12)$$

Now we consider pulsed type-II frequency-degenerate parametric down conversion(PDC), which can be described by the interaction

$$H = i\gamma(a_{H2}^\dagger a_{V3}^\dagger + a_{V2}^\dagger a_{H3}^\dagger - a_{H2} a_{V3} - a_{V2} a_{H3}) \quad (13)$$

where $a_{H2}^\dagger$ is the creation operator for a photon with polarization H propagating along path 2 etc. This is the familiar Hamiltonian for the creation of polarization entangled photon pairs, which has been the basis for many experiments in quantum information[19, 35]. For initial vacuum state, one can show that this interaction leads to

$$\Phi'_{ancilla} = (1 - \gamma_1) \sum_{n=0}^{\infty} \sqrt{n+1} \gamma_1^{n/2} \Psi^n \quad (14)$$

where $\gamma_1 = \tanh^2(\gamma t)$ and

$$\Psi^n = \frac{1}{\sqrt{n+1}n!} (a_{H2}^\dagger a_{V3}^\dagger + a_{V2}^\dagger a_{H3}^\dagger)^n |0\rangle \quad (15)$$

The output 2 of the first Type-II PDC is then used as one of the input of the second Type-II PDC and the Φ_{in} is desired to be teleported is the other input of the second Type-II PDC. After passing through the the second Type-II PDC, the state of the total system become

$$\begin{aligned} \Phi_{out} = & (1 - \gamma_1)(1 - \gamma_2)\sqrt{\gamma_2}[\sqrt{\gamma_2}\alpha|0\rangle_3 + \sqrt{\gamma_1}(1 - 2\gamma_2)\beta|H\rangle_3 \\ & + \sqrt{\gamma_1}(1 - 2\gamma_2)\gamma|V\rangle_3] |HV\rangle_1 |HV\rangle_2 + \Psi_{other} \end{aligned} \quad (16)$$

where γ_2 is squeezed parameter of second Type-II PDC. The terms Ψ_{other} of this quantum state don't contribute to the events, which correspond to a four-photon coincidence $|HV\rangle_1 |HV\rangle_2$. The output state of the system, conditioned on the two-fold coincidence detection, is projected into

$$\Phi_{out} = \sqrt{(1 - \gamma_1)(1 - \gamma_2)} [\sqrt{\gamma_2}\alpha|0\rangle_3 + \sqrt{\gamma_1}(1 - 2\gamma_2)(\beta|H\rangle_3 + \gamma|V\rangle_3)] \quad (17)$$

If we choose the parameter γ_1 and γ_2 to satisfy equation(11), we can obtain the expected teleported state $\Phi_{out} = \alpha|0\rangle + \beta|H\rangle + \gamma|V\rangle$ with probability of success $3(1 - \gamma_1)^2(1 - \gamma_2)^2\gamma_2^2$. For the experimental realization of the present scheme, a four-photon coincidence detection is needed. In the weak coupling regime, four-photon coincidence detection has been used for generation of four-photon GHZ state[35]. Fortunately our scheme can work in weak coupling, ($\gamma_2 \ll 1$ and $\gamma_1 \ll 1$), so that our scheme can be implemented with the present experimental technology.

IV. CONCLUSION

In summary, we have presented scheme for implementing a all-optical non-deterministic NLS gate and teleporting a superposition state of zero and single photon $\alpha|0\rangle + \beta|1\rangle$ and transmission of superposition of vacuum state and a polarized photon state of the form $\alpha|0\rangle + \beta|H\rangle + \gamma|V\rangle$, which require two non-degenerate squeezers and a multi-photon coincidence detection. Our scheme does not need single photon resource as auxiliary resources and only require three photon modes. However the price of avoiding single photon resource is a low success probability of NLS gate. We notice that the experimental setup of the present scheme has been illustrated in famous experiments by zou et al[33], where parametric down-conversion has been used to show an interference experiment. This has been accomplished by aligning the idler beam of the first parametric amplifier with the idler beam of the second parametric amplifier. For the implementation of a all-optical non-deterministic NLS gate, one requirement of our scheme is a strong coupling amplifier. The currently available parametric amplifier can produce strongly squeezed light[34], which can satisfy the requirement of the present scheme. Thus, the main difficulty of our scheme in respect to an experimental demonstration consists in the requirement on the sensitivity of the detectors. The present scheme require two-photon coincidence detection. In the weak coupling regimes, two-photon coincidence detection has been used for many polarization photon quantum information processing experiments[19]. In the strong coupling regimes, it is required that these detectors should be capable of distinguishing different photon number. Recently, experimental techniques for photon detection made tremendous progress. A photon detector based on visible light photon counter can distinguish between a single photon incidence and two photon incidence. A high quantum efficiency with a good time resolution and a low bit-error rate was reported [37]. However, in our scheme, we need a photon detector which should be capable of distinguishing different photon number. To fulfill the requirements of the presented scheme will be experimentally challenging. For the realization of teleportation of a vacuum and single photon superposition state ,the present scheme can operate in weak regime and require two-photon or four-photon coincidence detection. These requirement can be realized experimentally, which means that our scheme can be realized with the present experimental technology. The result imply that unconditional continuous variable teleportation of single photon polarization could be considered an alternative to the postselected scheme[19] using entangled photon state.

References

- [1] P. Shor in Proceeding of the 35th Annual symposium on the foundation of Computer Science (IEEE Comp. Soc. Press, Los Alomitos, CA, 1994) 124-134
- [2] Lov K. Grover Phys. Rev. Lett. 80, 4329 (1998)
- [3] Q. A. Turchette, C. J. Hood, W. Lange, H. Mabuchi and H. J. Kimble Phys. Rev. Lett. 75(1995)4710
- [4] C. Monroe, D. M. Meekhof, B. E. King, W.M. Itano and D. J. Wineland, Phys. Rev. Lett. 75(1995)4714; J. I. Cirac and P. Zoller, Phys. Rev. Lett. 74(1995)4091
- [5] D. Loss and D. P. Divincenzo, Phys. Rev. A. 57(1998)120

- [6] Y. Makhlin and G. Schon, nature 398(1999)305
- [7] Knill, Laflamme and Milburn, Nature, 409, 46-52(2001)
- [8] T.C.Ralph, A.G.White, W.J.Munro, G.J.Milburn, quant-ph/0108049
- [9] Terry Rudolph, Jian-Wei Pan, quant-ph/0108056
- [10] XuBo Zou, K. Pahlke, W. Mathis, quant-ph/0110177, to appear in PRA.
- [11] M. Koashi, T. Yamamoto, and N. Imoto, Phys. Rev. A 63, 030301 (2001).
- [12] T.B. Pittman, B.C. Jacobs, J.D. Franson, Phys. Rev. A 64, 062311 (2001).
- [13] Christian Brunel, Brahim Lounis, Philippe Tamarat, and Michel Orrit ,Phys. Rev. Lett. 83, 2722 (1999).
- [14] Charles Santori et al., Phys. Rev. Lett. 86, 1502 (2001)
- [15] P. Michler et al, Science 290, 2282(2000)
- [16] K. J. Resch, J. S. Lundeen, A. M. Steinberg, quant-ph/0205109.
- [17] C.H. Bennett, G. Brassard, C. Crpeau, R. Jozsa, A. Peres, and W. Wootters, Phys. Rev. Lett. 70, 1895 (1993).
- [18] A. Einstein, B. Podolsky, and N. Rosen, Phys. Rev. 47, 777 (1935)
- [19] D. Bouwmeester, J. M. Pan, K. Mattle, M. Eibl, H. Weinfurter, and A. Zeilinger , Nature (London) 390, 575 (1997);D. Boschi, S. Branca, F. De Martini, L. Hardy, and S. Popescu , Phys. Rev. Lett. 80, 1121 (1998).
- [20] S. L. Braunstein and H. J. Kimble, Phys. Rev. Lett. 80 (4), 869 (1998).
- [21] M. Brune, S. Haroche, J. M. Raimond, L. Davidovich, and N. Zagury, Phys. Rev. A 45, 5193 (1992).
- [22] L. Davidovich, N. Zagury, M. Brune, J. M. Raimond, and S. Haroche, Phys. Rev. A 50, 895 (1994).
- [23] J. J. Cirac and A.S. Parkins, Phys. Rev. A 50, 4441 (1994).
- [24] M. H. Y. Moussa, Phys. Rev. A 55, 3287 (1997).
- [25] M. H. Y. Moussa, Phys. Rev. A 54, 4661 (1996).
- [26] M. S. Zubairy, Phys. Rev. A 58, 4368 (1998).
- [27] Hai-Woong Lee and Jaewan Kim, Phys. Rev. A 63, 012305 (2001) , C. J. Villas-Bas, N. G. de Almeida, and M. H. Y. Moussa, Phys. Rev. A 60, 2759 (1999)
- [28] A. Furusawa, J. L. Sorensen, S. L. Braunstein, C. A. Fuchs, H. J. Kimble, and E. S. Polzik, Science 282, 706 (1998)
- [29] G. J. Milburn and S. L. Braunstein, Phys. Rev. A 60, 937 (1999).
- [30] J. Clausen, T. Opatrny, and D.-G. Welsch, Phys. Rev. A 62, 042308 (2000).

- [31] Toshiki Ide, Holger F. Hofmann, Takayoshi Kobayashi and Akira Furusawa Phys. Rev. A 65, 012313 (2002)
- [32] D. Gottesman and I. Chuang, Nature (London) 402, 390 (1999).
- [33] X. Y. Zou, L. J. Wang, and L. Mandel, Phys. Rev. Lett. 67, 318 (1991); L. J. Wang, X. Y. Zou, and L. Mandel, Phys. Rev. A 44, 4614 (1991).
- [34] O. Aytr and P. Kumar, Phys. Rev. Lett. 65, 1551 (1990).
- [35] D. Bouwmeester et al , Phys. Rev. Lett. **82**, 1345 (1999); J. W. Pan et al, Phys. Rev. Lett. **86**, 4435 (2001).
- [36] Hwang Lee, Pieter Kok, Nicolas J. Cerf, Jonathan P. Dowling, Phys. Rev. A 65, 030101 (2002); Jaromir Fiurasek, Phys. Rev. A 65, 053818 (2002); XuBo Zou, K. Pahlke and W. Mathis, quant-ph/0110168, quant-ph/0110149, to appear in PRA
- [37] Jungsang Kim, Shigeki Takeuchi, Yoshihisa Yamamoto, and Henry H. Hogue, Applied Physics Letters, 74, 902 (1999)

Figure Captions

Figure1 . The schematic is shown to implement the non-deterministic quantum logic operation, which has been explained in the paper.

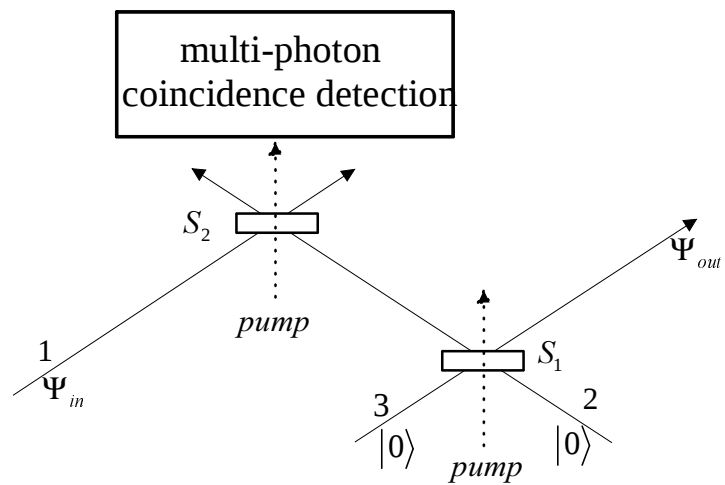


Fig1